



Bazooka In Ground Umbrella Base.

- 11 Lbs.
- Two piece design. 16" stem with 24" overall height.
- Accomodates 1 1/2" diameter umbrella pole. Also available in 2" dia.
- Dual locking screws.
- Stainless steel locking plate and latch.
- Used for concrete, soil, and deck installation.

Item #: FF BZ-SM

BAZOOKA
IN-GROUND SLEEVE SYSTEM

Accommodates 1 1/2" Diameter Umbrella Pole

Stainless Steel Locking Plate & Latch



5" Diameter

22"


IN-GROUND SLEEVE



12"

7"

CAM&LOCK
ASSEMBLY & INSTALLATION

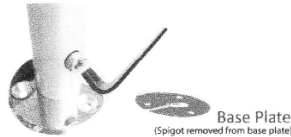


Base Plate
(Spigot removed from base plate)

Attach spigot to balate
Insert hex key rotate until CAMLOCK engages

Remove key and store in safe place.



Concrete
3 x countersunk concrete screws (6.5mm x 60mm)
OR
3 x countersunk dynabolts (min. 5/16")




Wooden Deck
BEARERS
KOSCIUSKO
(All bolts must be secured to bearers)

Concrete Slab should be minimum 3" thick

CAM&LOCK
ASSEMBLY & INSTALLATION



Top View

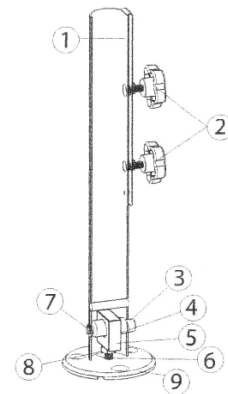

1. Spigot Pipe
2. Umbrella Locking Screws
3. Cam Bolt
4. Cam Barrel
5. Cam Block
6. Cam Screw
7. Circle Clip
8. Cam Screw Locking Nut
9. Base Plate



Bottom View



National Outdoor Furniture
1210 W. Main Street #296
Riverhead, N.Y. 11901

PHONE (888) 663-4621
E-MAIL nofinc1@gmail.com

www.nationaloutdoorfurniture.com